

Delco Wire and Cable Product datasheet. Please call your sales rep for details.

PRODUCT DATA SHEET

36910 24 AWG 10 COND PVC FOIL SHIELD CSA style - AWM A/B, CMGUL style - CM, CMR/CL3R TO ORDERFlame Test - FT4

Product Number: 36910
 Description: 24 AWG (7 X 32) TC 10 COND., SR-PVC INSULATION, O/A ALUM/POLY SHIELD, STC DRAIN, GRAY PVC JACKET

Image file:

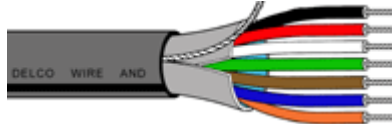


Image shown is a representation and does not necessarily reflect the actual product

AWG: 24
 Stranding: 7 X 32
 Conductor: TC
 Insulation: 0.009 inch SR-PVC
 Number Conductors: 10
 First Shield: O/A ALUM/POLY
 First Drain: STC
 Jacket Type: GRAY PVC
 Nom. Cable OD: 0.22
 Voltage: 600
 Temperature: -20°C to +105°C
 Weight: 34 lbs/mft
 CSA: AWM A/B, CMG
 UL: CM, CMR/CL3R TO ORDER
 Flame Test: FT4
 Table 7

Colour Code: 1 Black 2 White 3 Red
 4 Green 5 Brown 6 Blue
 7 Orange 8 Yellow 9 Violet
 10 Gray 11 Pink 12 Tan

Notes: 25% OVERLAP 100% COVERAGE
 Application: COMPUTERS EIA RS-232, DATA TRANSMISSION, AUDIO AND BROADCAST

Delco Wire and Cable Limited

Although every attempt is made to insure the accuracy of this document, Delco Wire and Cable Limited can neither express any warranties nor assume any liabilities.

© Delco Wire and Cable Limited 2014
 sales@delcowire.com
 Cable Capability You Can Depend On
 800.668.7127

